


FC6 INDOOR FIXED LED DISPLAY

FC6

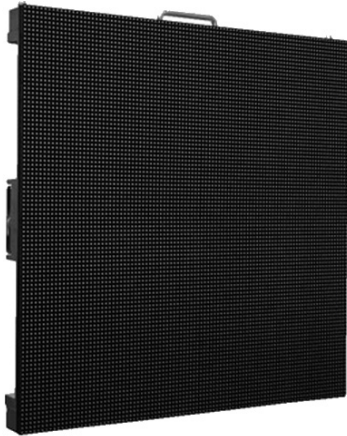

Features

- Support for both front and rear maintenance.
- Uniform color and high contrast ensure clear and sharp picture.
- High precision die-casting aluminum panel achieves high flatness and seamless matching of the whole display.
- Fan-less design with good dissipation guarantees noise-free effect.
- Light and slim panel is easy to handle and transport.
- High stability and reliability prolong the lifespan of LED display.



Specification

Item	Value
Pixel Pitch(mm)	6
Pixel Density(pixels / m ²)	27777
Viewing Angle(Deg.)	H: 140/ V: 140
Brightness(nits)	1800
Grey Level(bit)	16
Refresh Rate(Hz)	1920
Panel Dimension(mm)	576(W)x576(H)
Panel Dimension(inch)	22.68(W)x22.68(H)
Panel Resolution(pixels)	96×96
Panel Weight(kg)	11
Panel Type and Material	Die-casting aluminum
Module Size(mm)	288(W)x288(H)
Module Size(inch)	11.34(W)×11.34(H)
Protection Grade(Front/Rear)	IP20 / IP20 (Front / Rear)
Serviceability	Front / Rear
Avg.Power Consumption(W/ m ²)	200(AC)
Max.Power Consumption(W/ m ²)	600(AC)
Drive Mode	1/8 scan
Brightness Adjustment	Manual/Auto/Programmable
Operating Temp/Humidity(°C/%RH)	-20~+40/10~90
Storage Temp/Humidity(°C/%RH)	-40~+60/10~80
Lifetime(hours)	≥50000(Nomal Temp)
Compliant Standard	CE,FCC,RoHS

Notes: Specifications are for reference only. Please contact our salesperson for details. All rights are reserved to LED Cube System Sdn Bhd