


FU15S OUTDOOR FIXED LED DISPLAY

FU15S

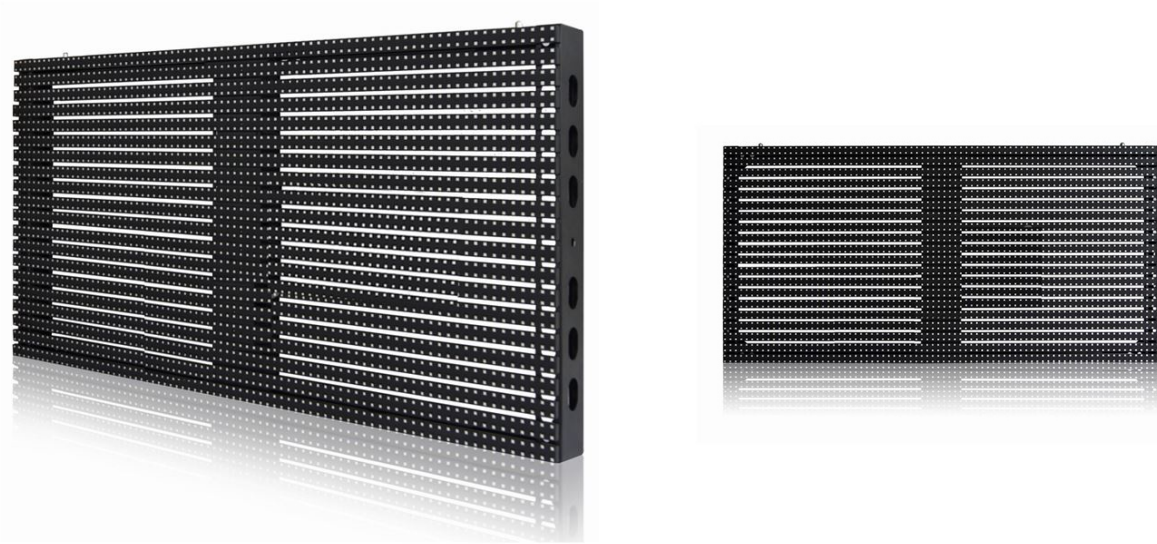

Features

FU15S P15 fullcolor advertising outdoor LED display



Future Series only weighs 22kg/m² while the traditional outdoor screen is normally 60kg/m², the weight of which is decreased by 63%.



The installation just needs a location for the installation of frame instead of heavy steel structure, which can significantly reduce the load-bearing of buildings;



Self heat dissipation excludes the demand for air conditioning, saving power and expense;



The porous design can fulfill air convection and protect the screen against strong wind;



Single cabinet can be directly dismantled from the frontage of the screen, easy to maintain;



The permeability can reach 40-70% according to different distance so it won't influence the lighting inside the building;



High brightness and waterproof IP66.

Specification

Item	Value
Pixel Pitch(mm)	15
Pixel Density(pixels / m ²)	4444dots / m ²
Viewing Angle(Deg.)	H: 140 / V: 140
LED Configuration	1R,1G,1B
Colors	>16.7M
Brightness(nits)	8500CD/M2
Grey Level(bit)	16bit
Refresh Rate(Hz)	>4800HZ
Viewing Angle(Deg.)	H: 110 / V:45
Dimension(inch)	1200mm x 600mm x 88mm
Resolution(pixels)	80 x 40mm
Panel Weight(kg)	18.5KG
Protection Level	IP65
Input Voltage	AC 85V~250V+/-10%
Source	DVI,RGB,CVBS,HDMI,YUV,SDI etc
Operating Temperature	-20°C~ +40°C
Storage Temperature	-20°C~ +60°C
Operating Humidity	10%~90%
Storage Humidity	10%~85%
Life Span	100,000 hrs

Notes: Specifications are for reference only. Please contact our salesperson for details. All rights are reserved to LED Cube System Sdn Bhd